


# DPM 951

3½-digit LCD Digital Panel Meter (24x48mm)



24mm x 48mm (0.9in x 1.9in) Panel mount digital meter with a 200mv full scale input. 10mm height character display with annunciators for common engineering units and suitable for operation with either 5VDC or 9VDC power.

LCD modules with a full scale reading at 200mV and operated from either 5VDC or 9VDC.

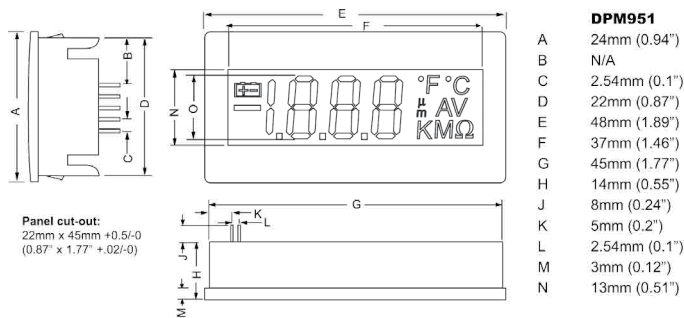

### Features

- Low power consumption
- 10mm black character high contrast LCD display
- Integrated backlight
- 24mm X 48mm bezel
- 5 or 9VDC operation
- 200mV full scale
- Scaleable
- CE Approved


# DPM 952

3½-digit LCD Digital Panel Meter (36x72mm)



36mm x 72mm (1.4in x 2.8in) Panel mount digital meter with a 200mv full scale input. 14mm height character display with annunciators for common engineering units and suitable for operation with either 5VDC or 9VDC power.

LCD modules with a full scale reading at 200mV and operated from either 5VDC or 9VDC.

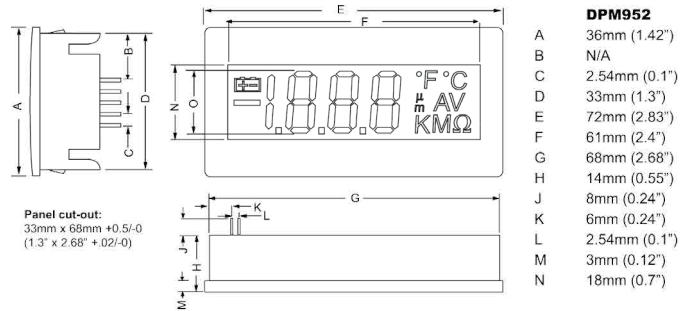

### Features

- Low power consumption
- 14mm black character high contrast LCD display
- Integrated backlight
- 36mm X 72mm bezel
- 5 or 9VDC operation
- 200mV full scale
- Scaleable
- CE Approved

### Specification

<b>Supply Voltage</b>	5V mode: 3 - 7VDC 9V mode: 7 - 12VDC
<b>Display</b>	3½-digit black LCD, 10mm characters
<b>Supply Current</b>	2mA typical
<b>Sample rate</b>	3 per second
<b>Backlight Current</b>	80mA MAX
<b>Accuracy</b>	0.1% ± 1 count
<b>Operating Temp.</b>	-10°C to +50°C [14°F to 122°F]
<b>Storage Temp.</b>	-20°C to +70°C [-4°F to 158°F]

### Specification

<b>Supply Voltage</b>	5V mode: 3 - 7VDC 9V mode: 7 - 12VDC
<b>Display</b>	3½-digit black LCD, 14mm characters
<b>Supply Current</b>	2mA typical
<b>Sample Rate</b>	3 per second
<b>Backlight Current</b>	160mA MAX
<b>Accuracy</b>	0.1% ± 1 count
<b>Operating Temp.</b>	-10°C to +50°C [14°F to 122°F]
<b>Storage Temp.</b>	-20°C to +70°C [-4°F to 158°F]

### Ordering Information

DPM951-T - Digital panel meter

### Ordering Information

DPM952-T - Digital panel meter